

Hydrocomponents and Technologies, Inc.

VESSELS & ACCESSORIES

Fiberglass Retaining Clamp Vessels 1000 PSI



Features


PV-2500SW Series	2.5" internal diameter	1000 PSI work pressure
PV-4000SW Series	4.0" internal diameter	1000 PSI work pressure

- Durable non-corrosive fiberglass housing in natural color. White color finish optional.
- End entry feed and brine ports are standard on all models.
- Anodized Aluminum Retaining Clamp locking devices for easy installation.
- Flush mount Anodized Aluminum or Acetal co-polymer end plugs with S.S. backing plates make fitting installation effortless.
- Maximum separation between permeate port and feed/concentrate port allow the use of large fittings.
- Ethylene propylene FDA approved "O" rings are standard. Silicon and other compounds available upon request.
- Universal style models also manufactured to fit membrane of your choice.
- Other lengths available upon request.

Hydrocomponents and Technologies, Inc.

VESSELS & ACCESSORIES

Fiberglass Retaining Clamp Vessels 1000 PSI

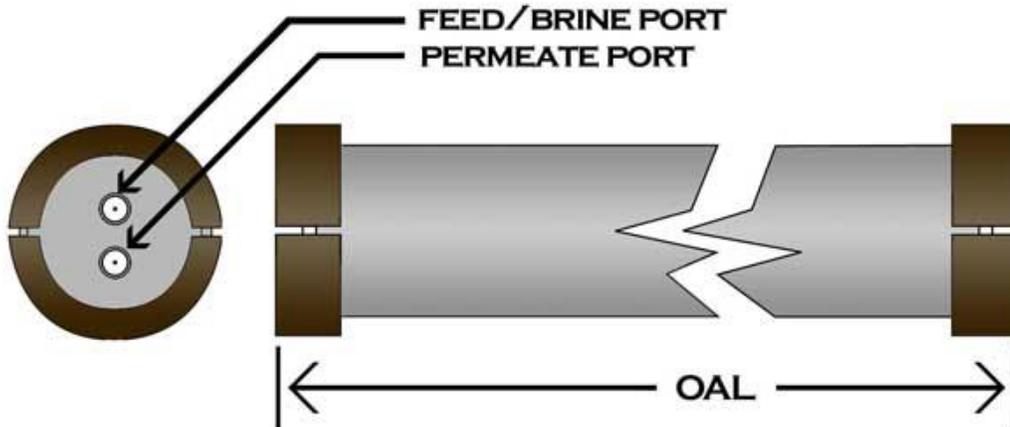

SELECTION CHART

VESSEL SERIES NUMBER	NOMINAL		RATED WORK PRESS.	MAX WORK PRESS.	MODEL NUMBER	MEMBRANE SIZE	# OF MEMB.	OAL IN.	PORT SIZES (NPT)			
	ID	OD							FEED	BRINE	PERM.	D
PV-2500SW	2.5"	3.00"	1000 PSI	1000 PSI	2514SW	2.5"x14"	1	17"	1/4"	1/4"	1/4"	N/A
					2521SW	2.5"x21"	1	24"	1/4"	1/4"	1/4"	N/A
					2540SW	2.5"x40"	1	43"	1/4"	1/4"	1/4"	N/A
					2580SW	2.5"x40"	2	83"	1/4"	1/4"	1/4"	N/A
					25120SW	2.5"x40"	3	123"	1/4"	1/4"	1/4"	N/A
PV-4000SW	4.0"	4.75"	1000 PSI	1000 PSI	4014SW	4.0"x14"	1	17"	1/2"	1/2"	1/2"	N/A
					4021SW	4.0"x21"	1	24"	1/2"	1/2"	1/2"	N/A
					4040SW	4.0"x40"	1	43"	1/2"	1/2"	1/2"	N/A
					4080SW	4.0"x40"	2	83"	1/2"	1/2"	1/2"	N/A